

## Explanation of Part Numbers:

JW 52 T 21

1 2 3 4

### 1 Style:

Jumper Wire

### 2 Wire Length:

52mm 73mm

(Other lengths available upon request).

### 3 Packaging:

T = Tape & Reel

TB = Tape & Box

### 4 Gauge (awg):


20 = 20 awg

21 = 21 awg

22 = 22 awg

23 = 23 awg

24 = 24 awg

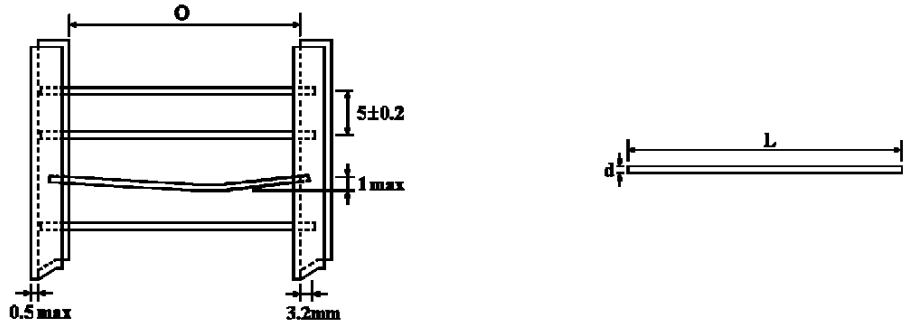

Style	L±3	d <sup>+0.02</sup> <sub>-0.05</sub>	O±1	
JW52T-24	60	0.5	52	26
JW52T-23	60	0.6	52	26
JW52T-22	60	0.65	52	26
JW52T-21	60	0.72	52	26
JW52T-20	60	.8	52	26

## Characteristics:

Requirements	Characteristics
Maximum Resistance	Steel core type is 0.00165 , Ceramic core type is 0.0165
Lead Material	Tin - plated copper
Body Material (Zo - Type)	Electrical grade, high performance molding compound
Insulation Resistance	Dry - 10,000 M ; Wet - 100 M
Dielectric - Withstanding Voltage	Atmospheric - 500V RMS., Reduced - 325V RMS
Insulation Flammability	Resistor Insulation is self extinguishing within 10 seconds after externally applied flame is removed
Current Rating	25 AMPS at 25°C derating to 0 Amps at 150°C